



Window :
for tunnel inside -outside
Assembly instructions



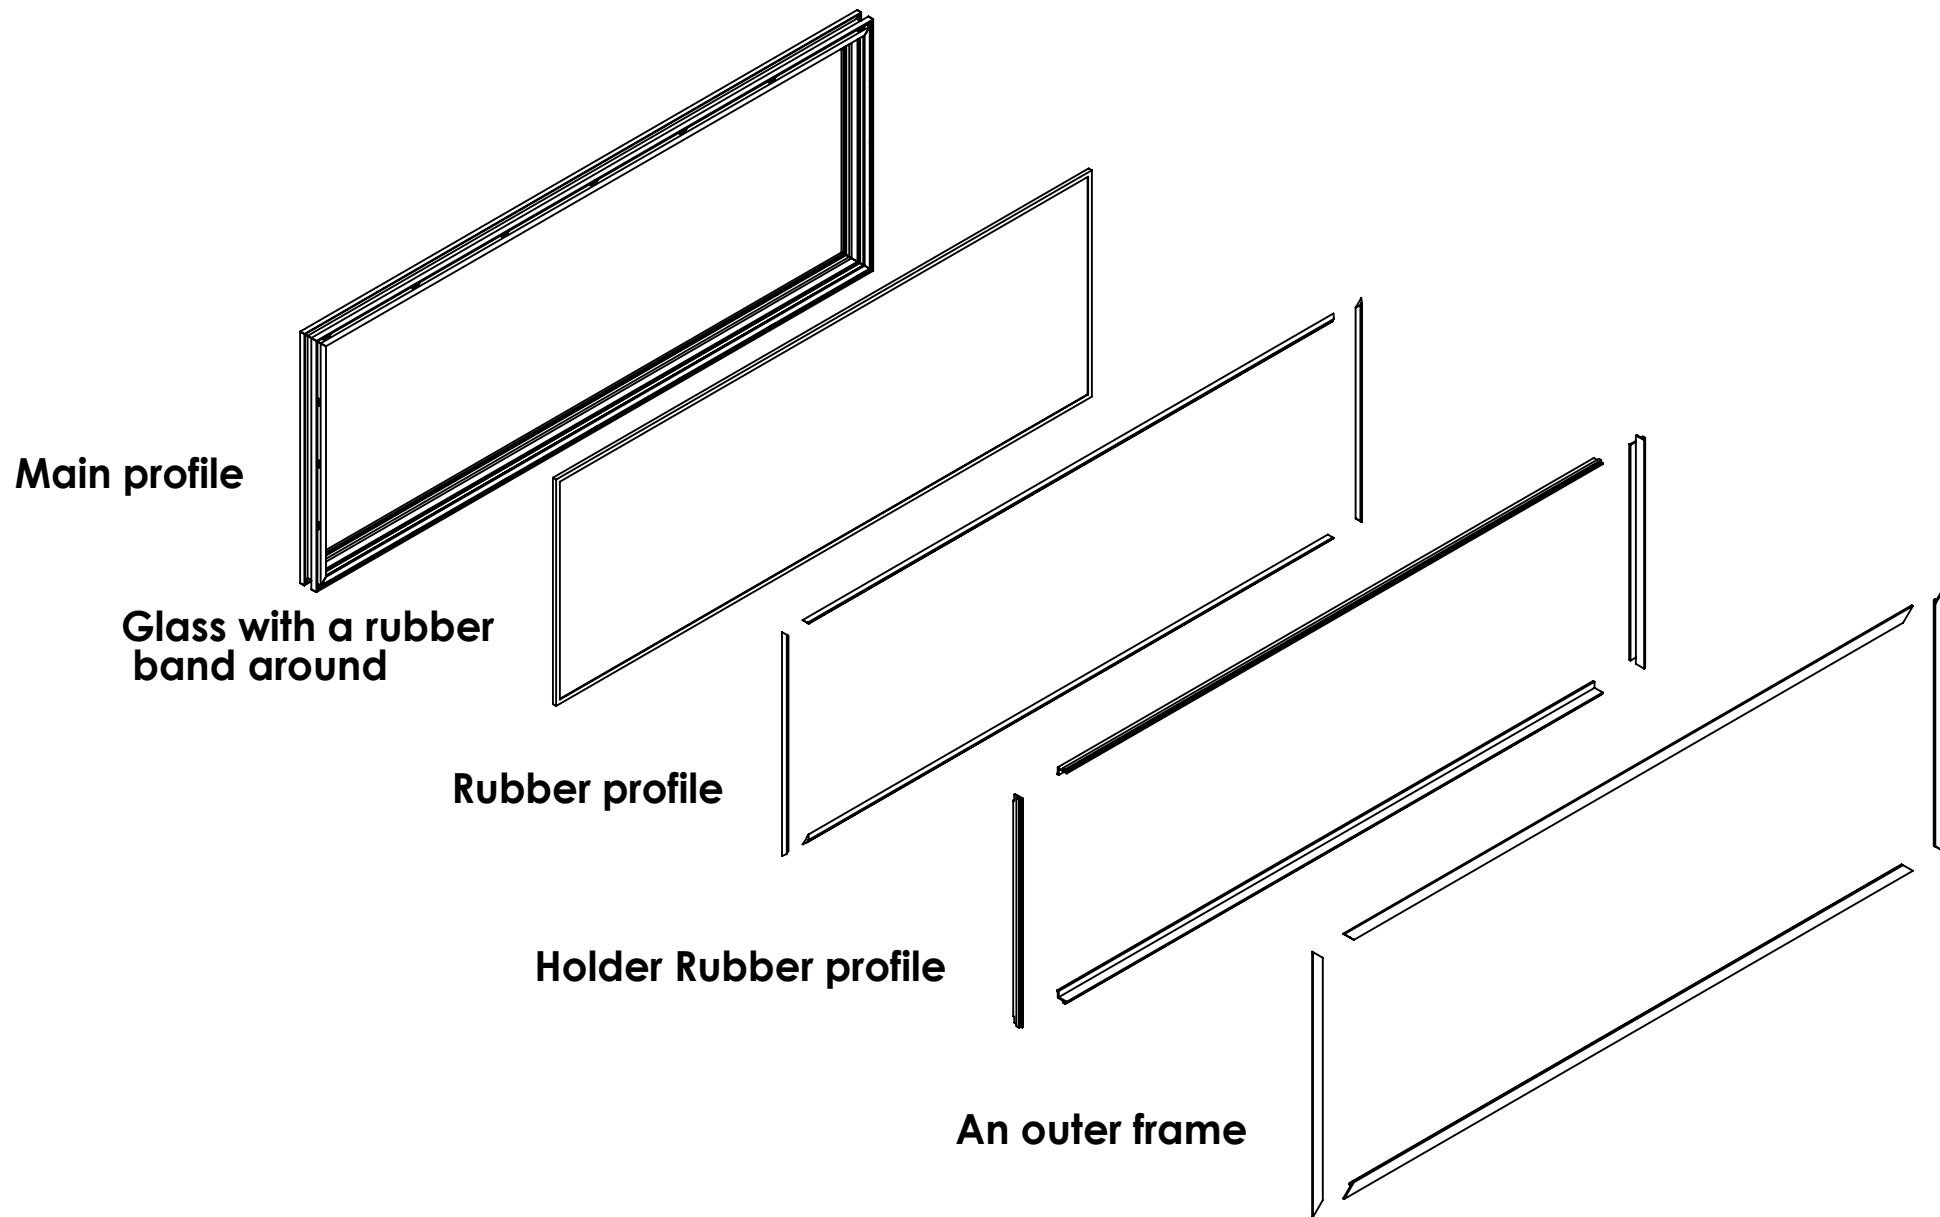

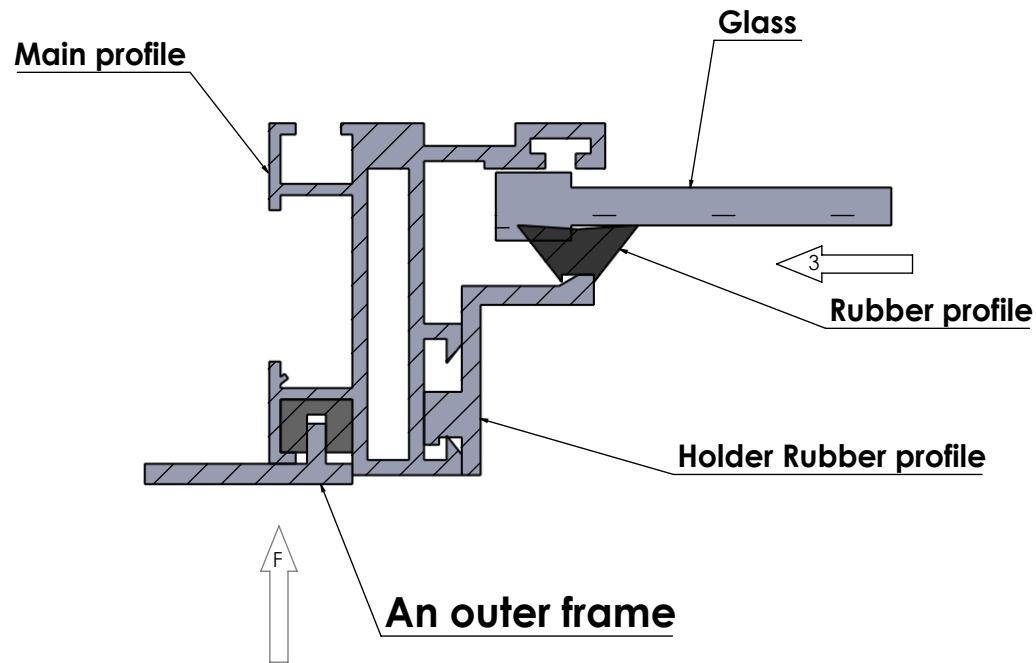

SECTION F-F
SCALE 1 : 1

NOTES:

- To Disassemble the glass
A - Remove the rubber(Start from corners).
B - Remove the holder rubber profile

- Glass assembly
C - Insert the glass to the place.
D - Insert the holder rubber profile.
E - Insert the rubber.
1-Put the rubber against the glass.
2-Note that the rubber is in its place.
3-Push the rubber to its place
F - The outer frame can unwind by pulling